

RT-S32U-6060 Technical specs:


- Exquisite design with precise dimensions and craftsmanship,
- Good compatibility which is available to various servers perfect ventilation.
- Main material: Cold-rolled steel, SPP.
- Dimensions Width 600 Depth 600 Height 1530 mm
- Front Glass Door 5.0mm , Solid Rear Door.
- Adjustable front/back profile rails with scales on 2.0mm.
- Side panels can be two panels for each one or one for each one.
- Closable top/bottom cable entry openings.
- Removable side panels and front/back doors for operation and watching.
- Moon Shape Lock.
- 2 Fan Set 12' installed with Metal Grid.
- 4 Casters and support feet can be installed simultaneously.
- Surface treatment: Degreasing, pickling, phosphate, laundering, powder coating; IP20
- Load capacity: Static load: 720 KG
- PDU 6 WAYS with the package, 1 Shelf with the package.
- Comply with ANS/EIA RS-310-D, IEC297-2, DIN41491, PART1: Part 1 & 7, ETSI Standards



PDU 8 ways EU.



support feet

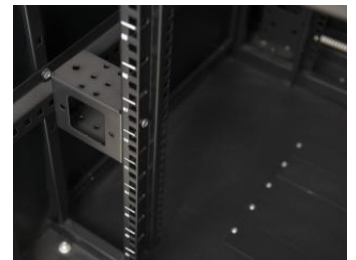

Profile Rails with scale

RT-S32U-6060 Technical specs:`

names	quantity	unit	materials	surface treatment	Remarks
top covers	1	pc	1.2 mm cold-rolled steel	powder coating	---
bottom plates	1	pc	1.2 mm cold-rolled steel	powder coating	---
fan plate with 4 fans	1	pc	1.2 mm cold-rolled steel	powder coating	2 fans for 600*600 racks
frames	2	pc	1.2 mm cold-rolled steel	powder coating	---
front doors	1	pc	5 mm/1.2mm 5mm tempered glass/1.2mm cold-rolled steel	powder coating	door type C
back doors	1	pc	1.2 mm cold-rolled steel	powder coating	door type D
side panels	2	pc	1.2 mm cold-rolled steel	powder coating	---
horizontal brackets	6	pc	1.2 mm cold-rolled steel	powder coating	---
rails	4	pc	2.0 mm cold-rolled steel	powder coating	1.5mm thick steel for less than 22U
shelves	1	pc	1.2mm cold-rolled steel	powder coating	1 pc for 18-22U, 2 pcs for 27-37U, 3 pcs (600 deep) for 42-47U
casters	4	pc	---	---	---
M12 support feet	4	pc	---	---	---
cage nuts	40	pc	---	---	20 sets for 18U-22U, 30 sets for 27-37U, 40 sets for 42-47U
sockets with 6 outlets	1	pc	---	---	---

Types	capacity	width (mm)	depth (mm)	height (mm)	packing dimensions			volumes 3(mm)	package		volumes (m3)
					length (mm)	width (mm)	height (mm)		B	C	
RT6632-S☆	32U	600	600	1106	615	615	1106	552j0	*615 *615 120	———	0.337